

DS-QAZ1MP7G1 **7-inch paging microphone**



- 7-inch color IPS touch screen
- Support live/schedule/emergency broadcasting, TTS
- Support 3.5 mm audio input
- Support partition management
- Support emergency call
- Support up to 6 shortcut options (F1 to F6) can be defined
- Support wired network access and standard PoE power supply




▪ Specification

Protocol	
Network Protocol	ISAPI, ISUP
Microphone	
Frequency Response	Gooseneck microphone: 100Hz to 15KHz, built-in microphone: 100Hz to 10KHz
Function	
Audio Bit Rate	MP3, 128 Kbps
Echo Cancellation	Yes
Network	
Client	HikCentral Professional
Interface	
Network Interface	1
Local Storage	Support TF card
Audio In	Gooseneck MIC, custom USB interface; LINE In × 1, 0 dBV, 100 kΩ, unbalanced, 3.5 mm jack; Local MIC
Audio Out	LINE Out × 1, 0 dBV, unbalance, 3.5 mm jack; Local speaker
Button	Physical buttons and on-screen buttons
Display Screen	IPS, 7 inches, 1024 × 600, touch screen
General	
Power	12 VDC, max.10 W
System Requirement	Embedded operating system
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Operating Humidity	10% to 90%

▪ Available Model

DS-QAZ1MP7G1

▪ Dimension

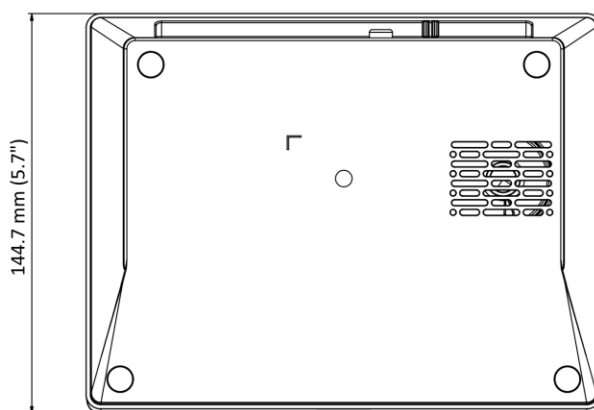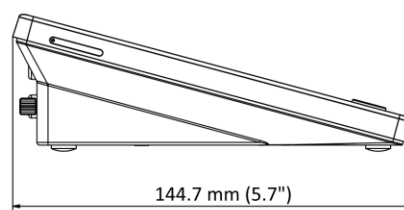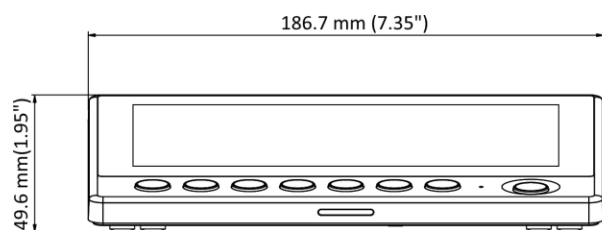

See Far, Go Further



www.hikvision.com
support@hikvision.com

